



MERU



BODY

Electrostatic powder coated aluminium body.

LED

100.000 hours LED lifetime according to LM-80 and TM-21 report.

DRIVER

Constant current output, With 90% efficiency, Effective power factor regulation that is not affected by fluctuations in grid voltage.

LENS

Resistant to UV rays, 90% optically efficient PC material IP65 lens.

PCB

Aluminum PCB, Aluminum Base Layer / Thickness: 1L / 1.6mm.
Copper Thickness: 1 OZ, HASL surface coating.

OPTIONS


Up to 6 metres customisable design.

TECHNICAL SPECIFICATIONS

RAL CODES

Standard	Optional	Optional
RAL 7016	RAL 9016	RAL 9022

ASYMMETRIC

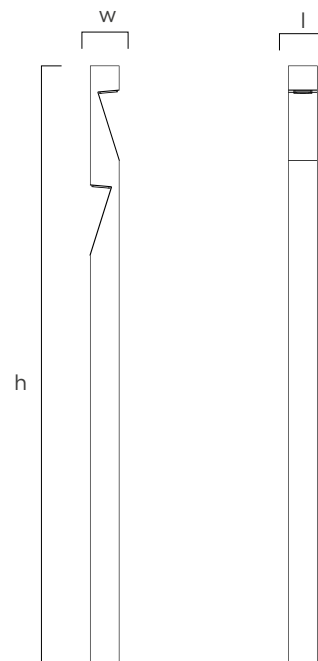

Product Code	Power	Lumen	Color Temperature	Dimensions l w h (mm)	Weight
DTY.064	10W	1200	3000-6500K	120x120x800	3 kg
	2*10W	2400	3000-6500K	120x120x3000	8 kg