

## WONT I-II



### BODY

Electrostatic powder coated aluminium body.

### LED

100.000 hours LED lifetime according to LM-80 and TM-21 report.

### DRIVER

Constant current output, With 90% efficiency, Effective power factor regulation that is not affected by fluctuations in grid voltage.

### LENS

Resistant to UV rays, 90% optically efficient PMMA/ PC material IP65 lens.

### PCB


Aluminum PCB, Aluminum Base Layer / Thickness: 1L / 1.6mm.  
Copper Thickness: 1 OZ, HASL surface coating.

## TECHNICAL SPECIFICATIONS

### RAL CODES

Standard	Optional	Optional
RAL 7016	RAL 9016	RAL 9022

### SYMMETRIC / ASYMMETRIC

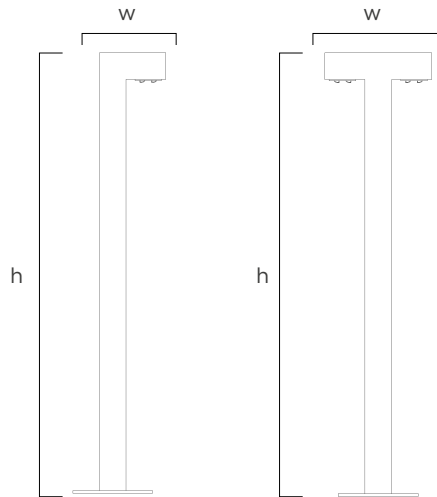

Product Code	Power	Lumen	Color Temperature	Dimensions w h (mm)	Weight	Carton Pieces
DTY.057	12W	1440	3000-6500K	105x200x600	2 kg	1
	12W	1440	3000-6500K	105x200x800	2,5 kg	1
	2*12W	2880	3000-6500K	200x350x800	2 kg	1
	2*12W	2880	3000-6500K	200x350x800	2,5 kg	1