




## LEGEND



### BODY

Electrostatic powder coated aluminum injection body resistant to UV rays, 4 mm heat and impact resistant with tempered clear glass, Console that can move in 15 degrees vertical and horizontal direction, smart gaskets, circuit breaker. 60mm console radius.

### LED

100.000 hours life according to LM 80 report, With 120° light angle, High Power LED with high color rendering index. 3000K-4000K-6500K.

### DRIVER

Constant current output, With 0.90 efficiency, PF:0,95, Effective power factor regulation that is not affected by fluctuations in grid voltage and provides constant light.

### LENS

-40C to + 80C operating temperature, 93% optically efficient PMMA group lens, Asymmetric Lens.


### PCB

Aluminum PCB, Aluminum Base Layer / Thickness: 1L / 1.6mm. Copper Thickness: 1 OZ, HASL surface coating.


### OPTION

Dimmable, Programmable Driver options. Emergency kit.

### RAL CODES



### ASYMMETRIC

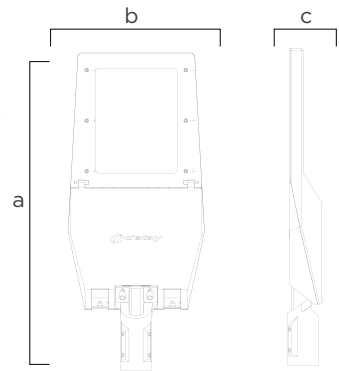

Product Code	Power	Lumen	Colour Temp	Colour Rendering	Power Factory	Dimensions (mm) a b c	Weight	Parcel Count
2000-001	60W	7200	3000-4000-6500K	80 CRI	0,95 cos	679 292 68	5 kg	3
2000-002	75W	9000	3000-4000-6500K	80 CRI	0,95 cos	679 292 68	5,5 kg	3
2000-003	100W	12000	3000-4000-6500K	80 CRI	0,95 cos	679 292 68	6 kg	3
2000-004	125W	15000	3000-4000-6500K	80 CRI	0,95 cos	679 292 68	6 kg	3
2000-005	150W	18000	3000-4000-6500K	80 CRI	0,95 cos	679 292 68	6kg	3