

SMART II

BODY

Electrostatic powder coated aluminium body, tempered glass.

LED

100.000 hours life according to LM 80 report, With 120 ° light angle, High Power LED with high color rendering index. 3000K-4000K-6500K.

DRIVER

Constant current output, With 0.90 efficiency, PF:0,95, Effective power factor regulation that is not affected by fluctuations in grid voltage and provides constant light.

LENS


Moduler group lens, symmetric Lens.

PCB

Aluminum PCB, Aluminum Base Layer / Thickness: 1L / 1.6mm. Copper Thickness:1 OZ,HASL surface coating.

OPTION


Programmable Driver, Emergency Kit.

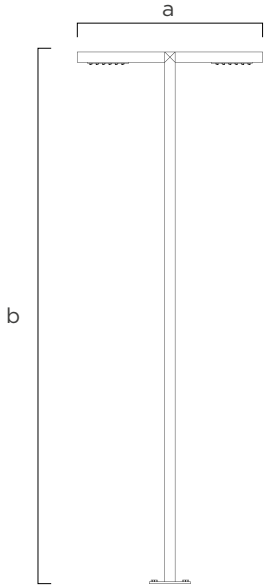

RAL CODES



SYMMETRIC



Product Code	Power	Lumen	Colour Temp	Colour Rendering	Power Factory	Dimensions (mm) a b c	Weight	Parcel Count
9000-230	2*30W	6750	3000-4000-6500K	80 CRI	0,95 cos	400 4000	18 kg	1